


HYDRAULIC UNIT

HYDRAULIC PISTON

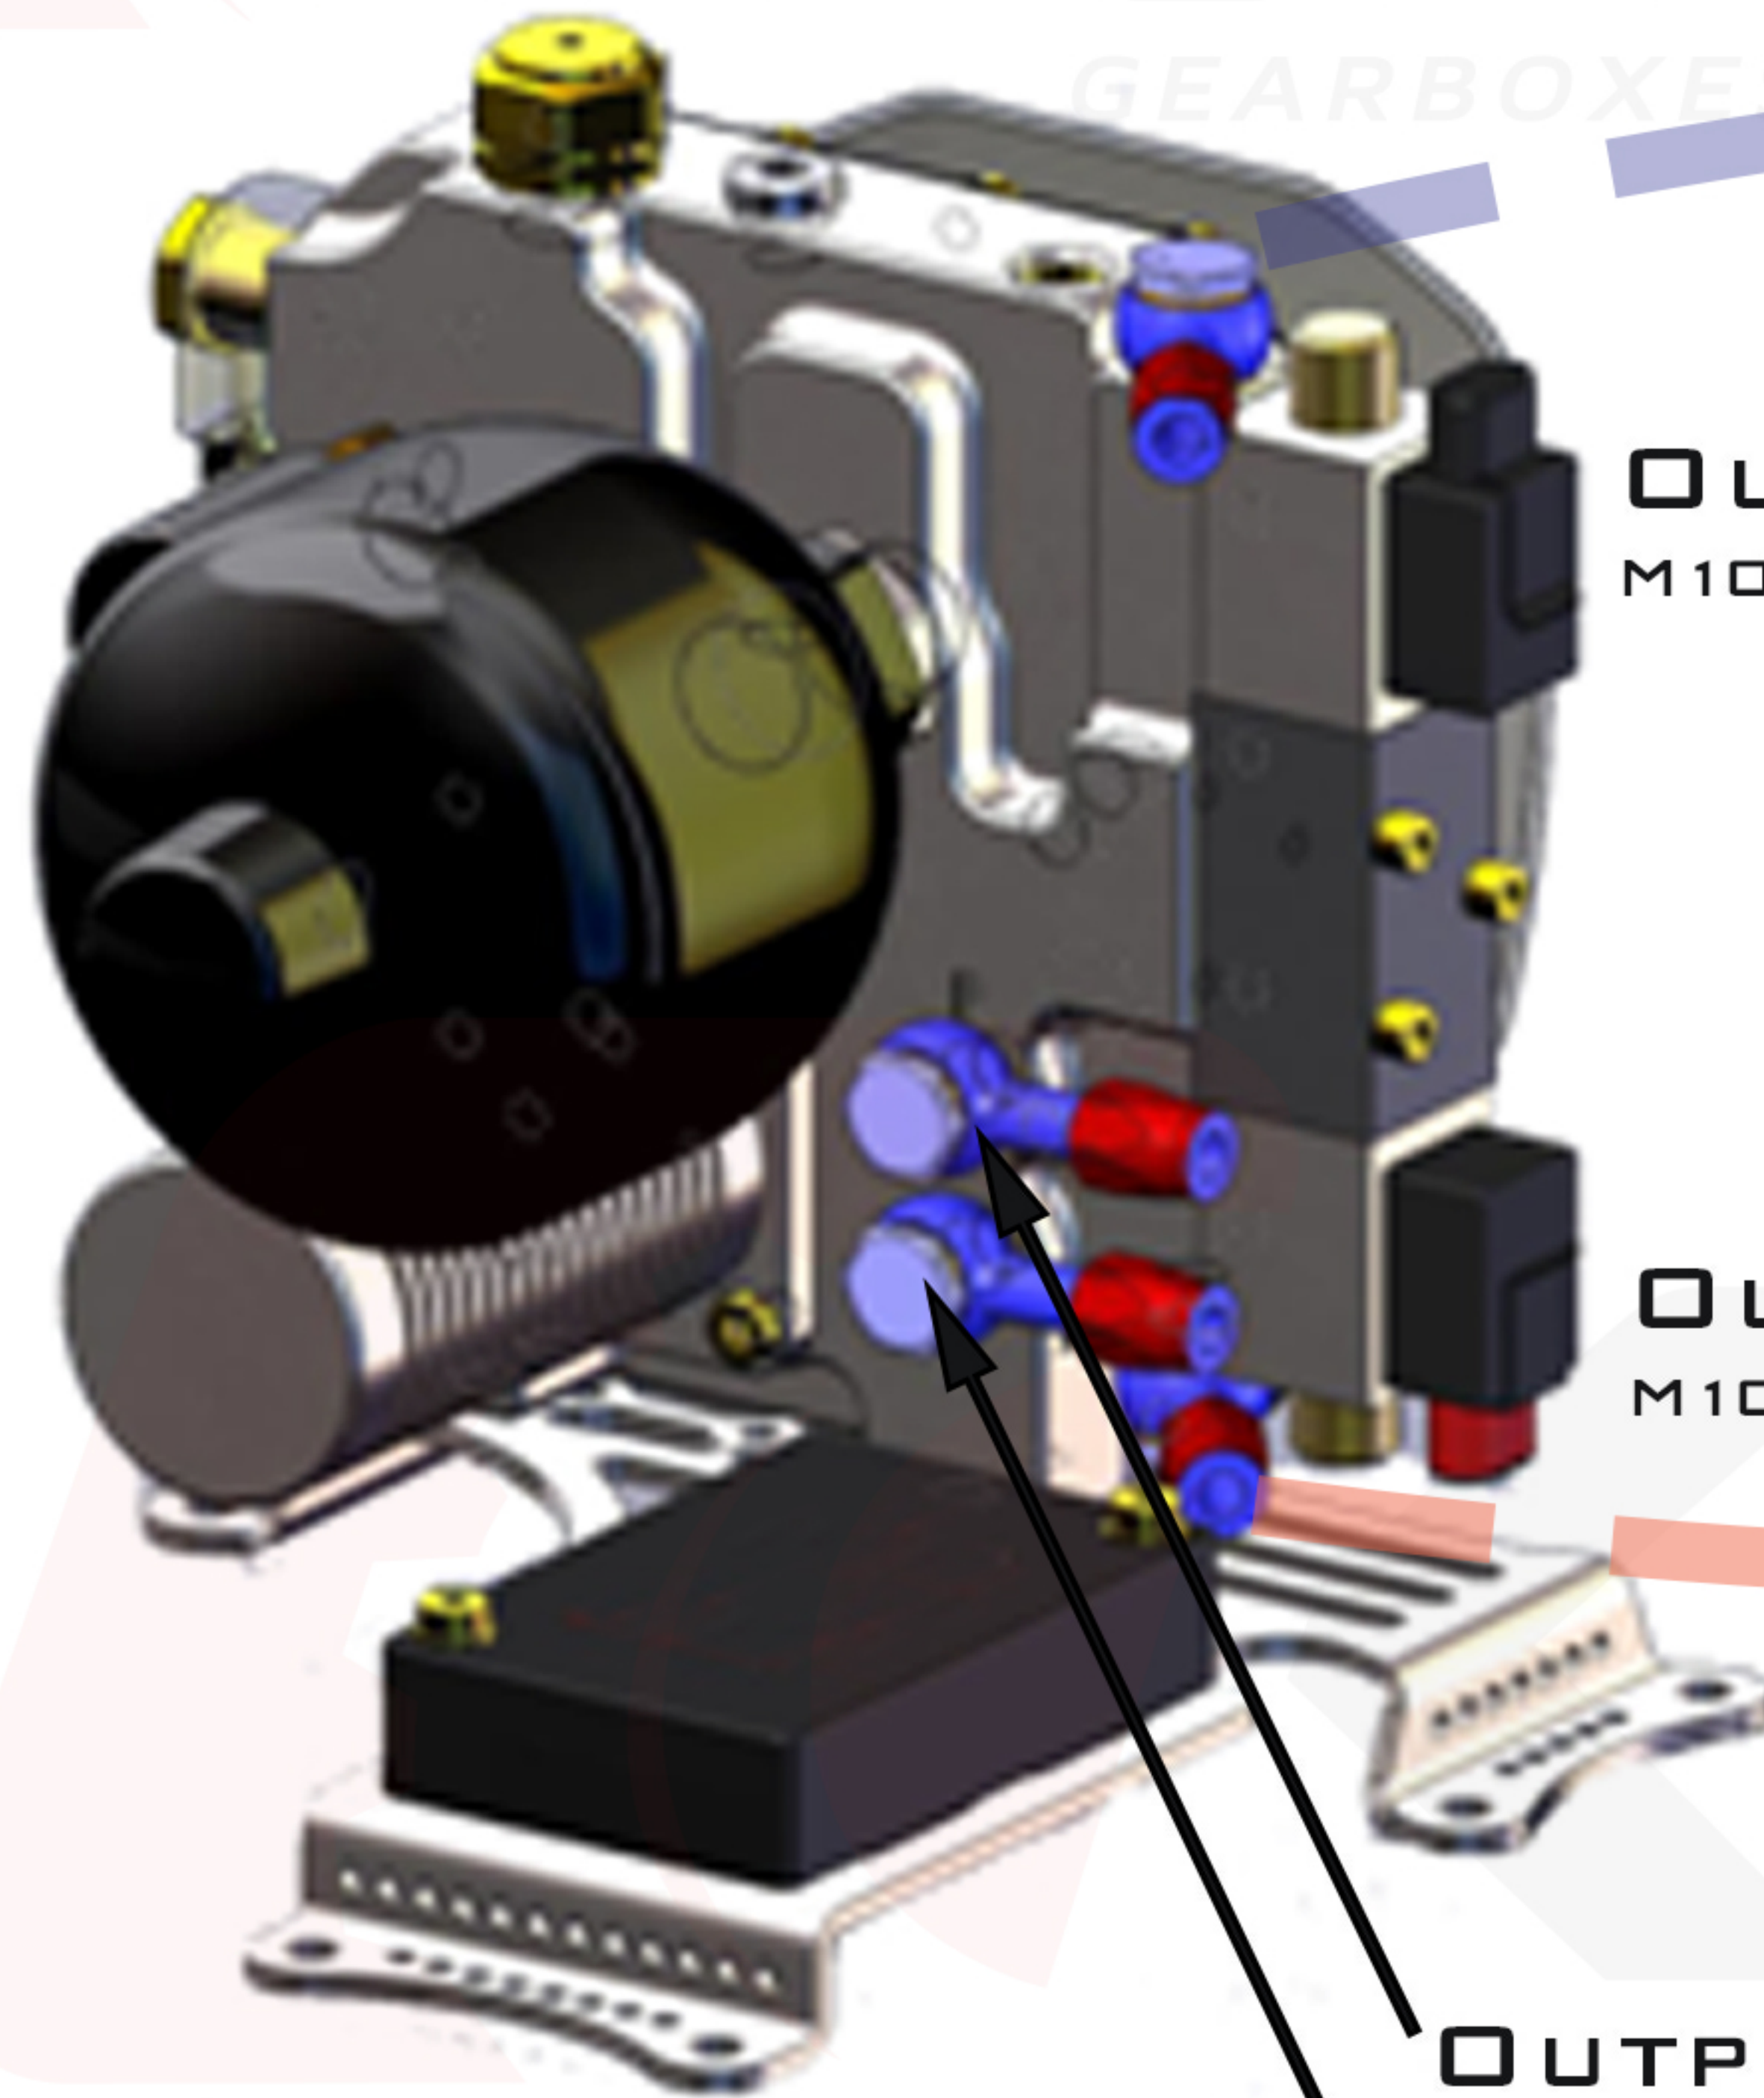


OUTPUT 1 "UP/DOWN"
M10x1

OUTPUT 2 "UP/DOWN"
M10x1

OUTPUT 3 - FREE USE
M10x1

OUTPUT 4 - FREE USE
M10x1

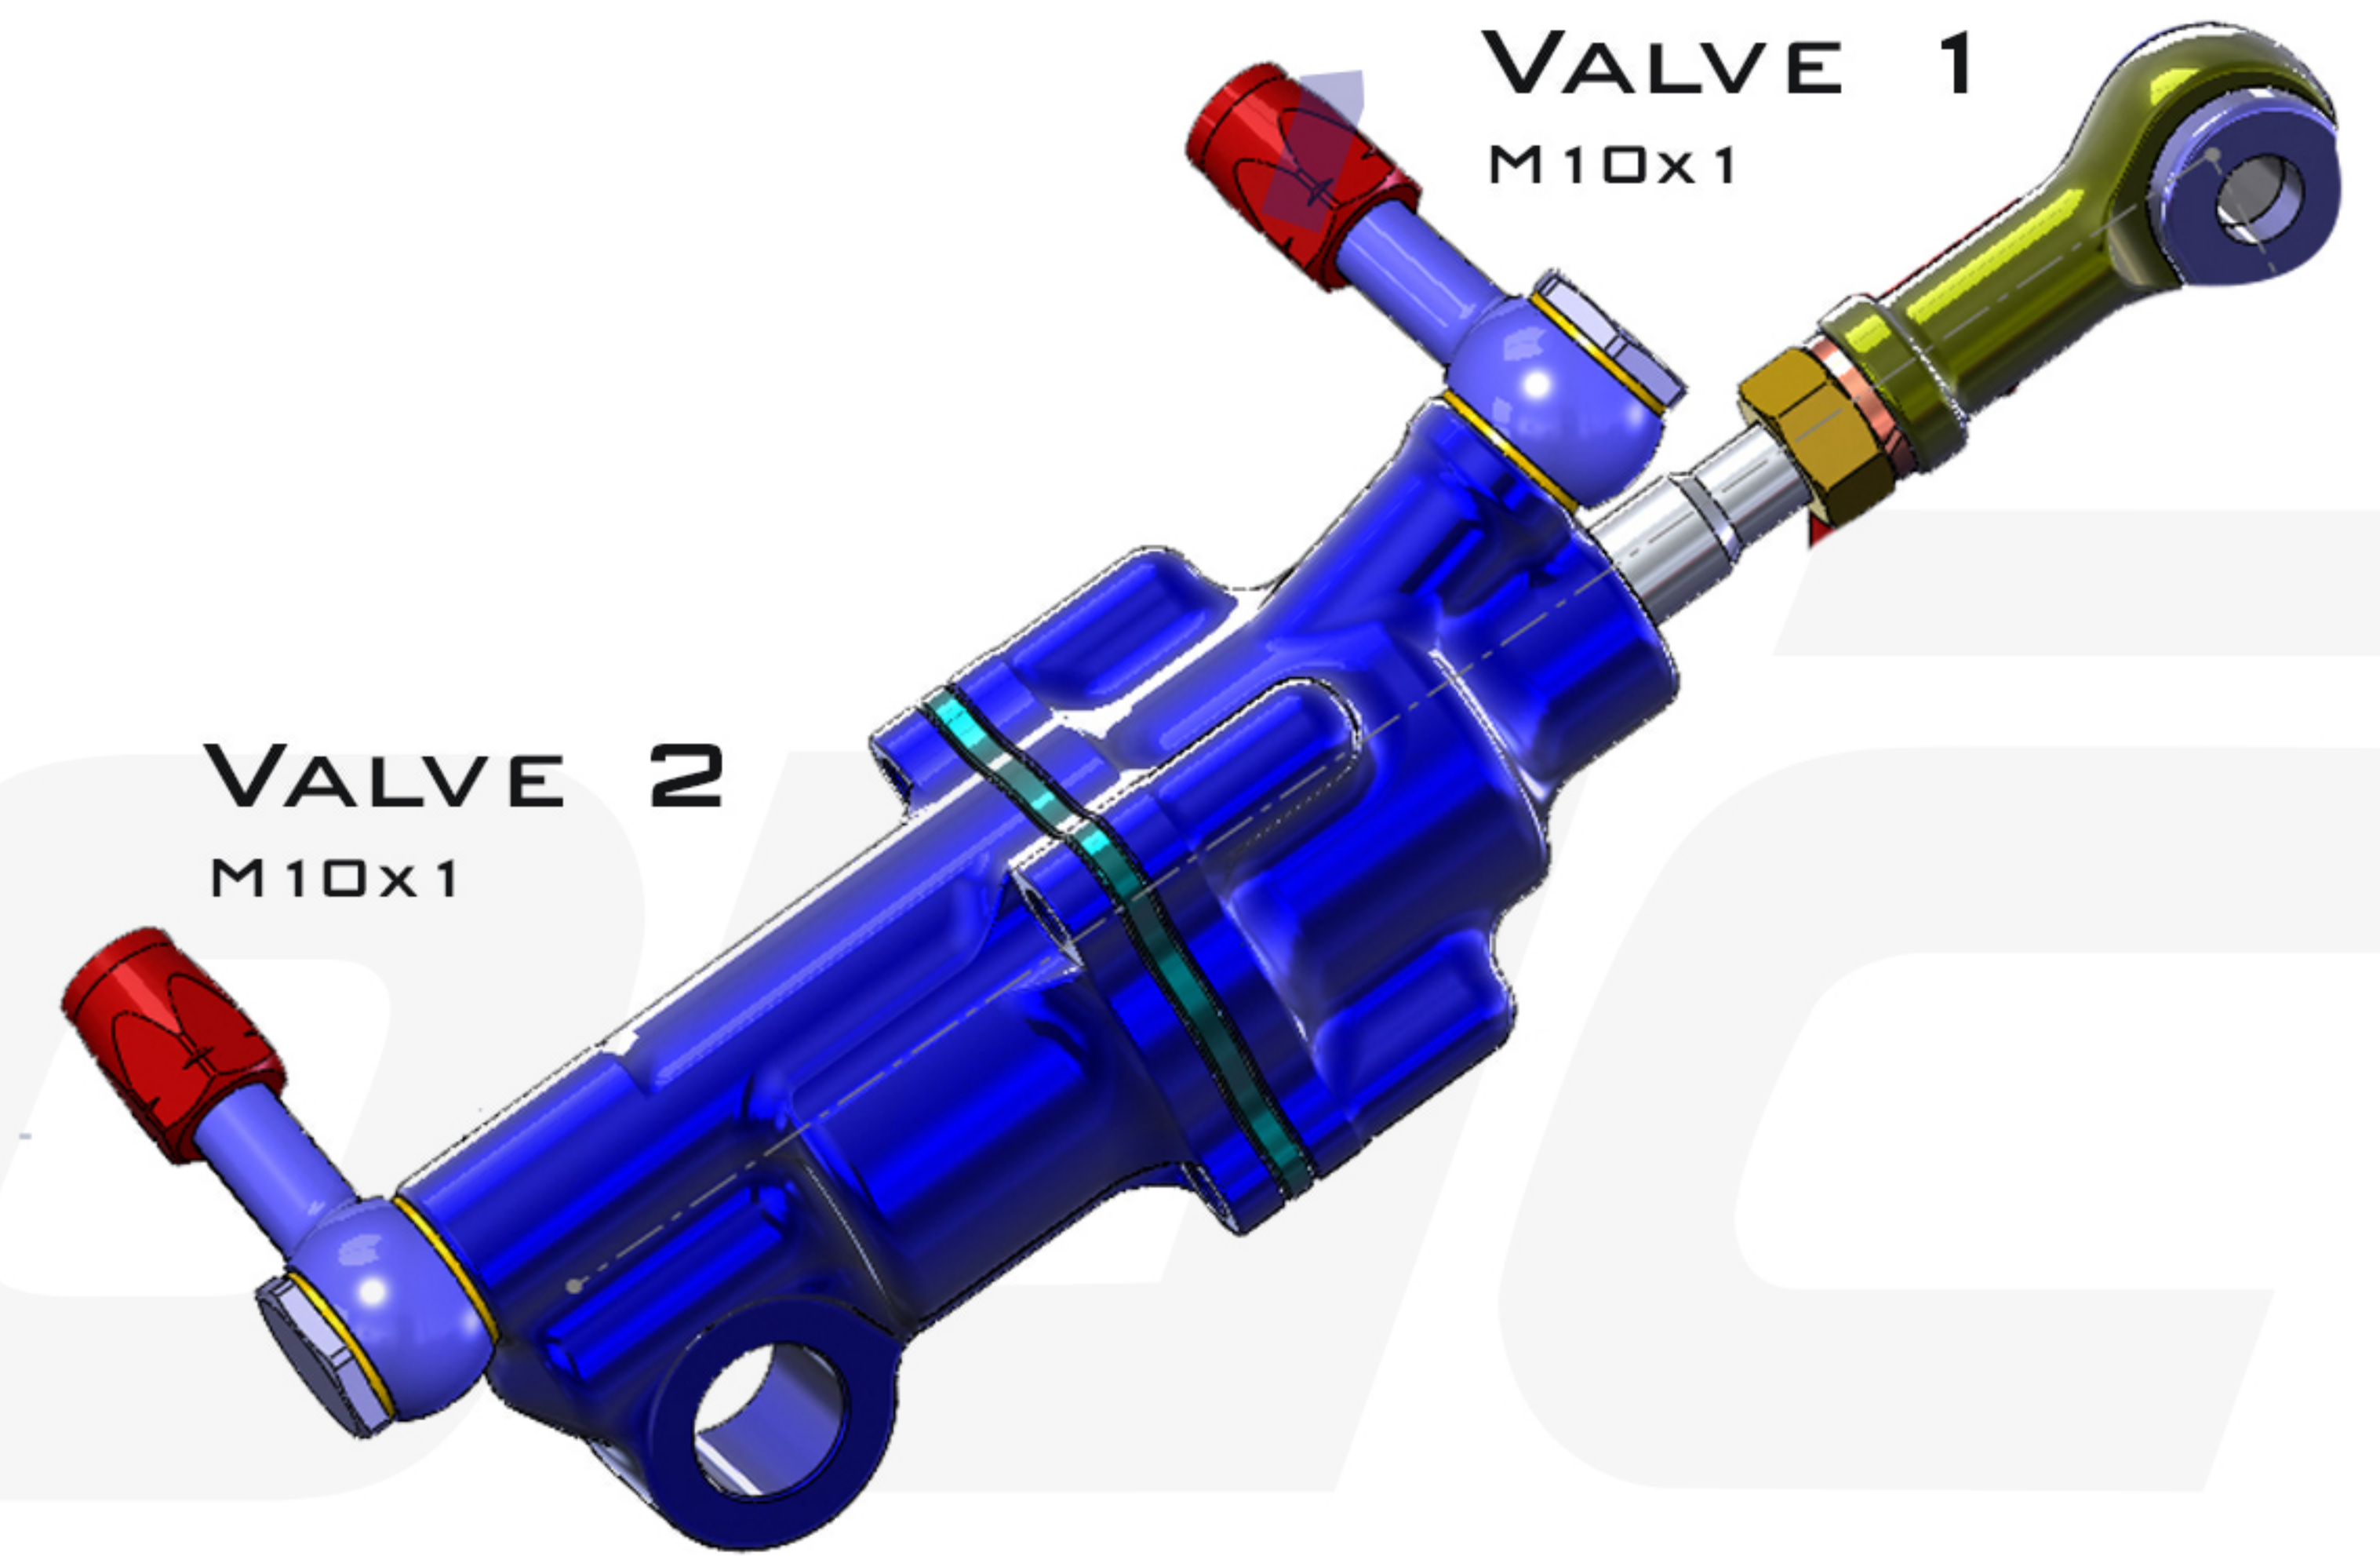

VALVE 1
M10x1

VALVE 2
M10x1

NOTES

Oil: Dexron III
 Operating Pressure: 80-95 bar
 Maximum Pressure: 100 bar
 Recommended piping:

- under 4m Dash 3
- over 4m Dash 4

Fill to oil level and bleed up and down hydraulic piping

MATERIAL: dle rozpisu	INDEX	DATA	DATUM	POPS
POSLUŽNÁK: dle rozpisu				
TOLEROVANÍ: ISO 8015 AND				
PŘESNOST: ISO 2768 - m K				
PROVÁKÁNÍ				
VYPRACOVÁNÍ	SCHVÁL	HMOTNOST	MĚŘENÍ	1:1
KONTROLOVÁNÍ	DATUM	SE. V.	KUSOVNÍK	
NÁZEV		HYDRAULIC UNIT PIPING SETUP		
ČÍSLO VÝKRESU				
KOTOUČ GEARBOXES				